




PRODUCT SPECIFICATIONS SHEET

Model Number

GH-1234 12V 3.4Ah

Prism batteries are rechargeable valve-regulated, lead acid technology at its best. With innovative design features, the battery is leak proof, useable in any position, non-corrosive and maintenance free.

Dimensions

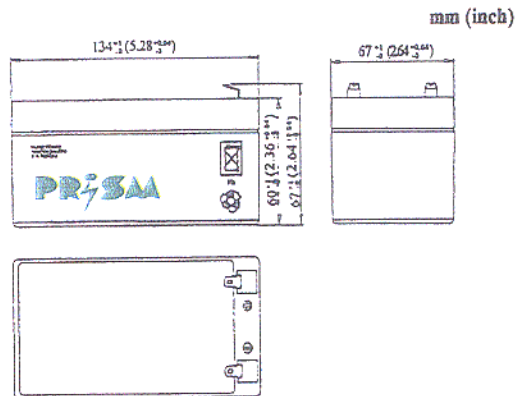

Specifications

Nominal Voltage:	12 V
Nominal Capacity:	3.4 Ah
Total Height:	67 mm (2.64 in)
Container Height:	60 mm (2.36 in)
Length:	134 mm (5.28 in)
Width:	67 mm (2.64 in)
Weight:	1.37 kg (3.02 lbs)
Max Discharge Current:	40 A (5 sec)
Internal Resistance:	40 mΩ
Standard Terminal:	Faston Tab 187
Container Material:	General Grade ABS

Characteristics


Capacity 25° C / 68° F

20 hour rate @ 0.17 A	:	3.4 Ah
5 hour rate @ 0.54 A	:	2.7 Ah
1 hour rate @ 2.04 A	:	2.04 Ah
1 C @ 3.4 A	:	1.7 Ah


Charging

Standby Use Voltage Settings	2.275±0.025 V/Cell
Temperature Range	20°C to 68°F
Compensation Range	±3.3mV/Cell/°C
Maximum Charging Current	0.99 A

Discharge Characteristics

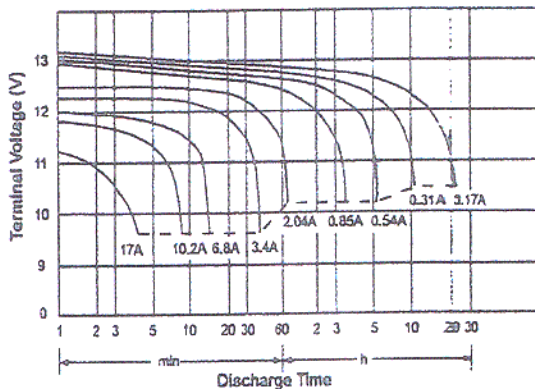

Discharge Current vs. Time

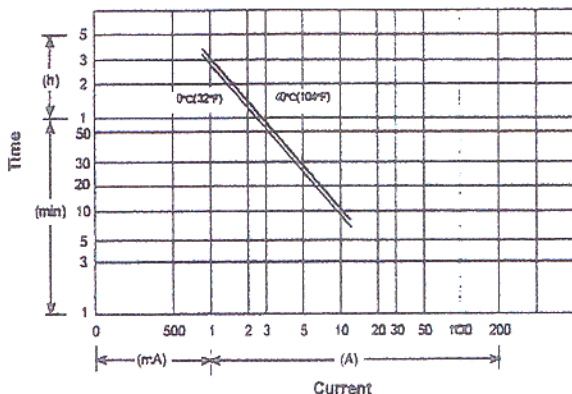

Marketed by:



3900 Highway 377 South, Suite 101, Fort Worth, Texas 76116 USA
 Tel: (817) 244-7777 Fax: (817) 244-4445 Toll Free: (800) 327-2872
 E-mail: usasls@csb-battery.com or latinsls@csb-battery.com